


NOTE:
1/16" TOLERANCE
ALLOWED FROM CENTERLINE
FOR EMBOSSMENT LOCATIONS
TOP TO BOTTOM
AND SIDE TO SIDE.

NOTE:
THIS LAYOUT BASED ON:
3'0" X 6'8" EMBOSSED DOOR
FOR 7'0 DOORS
EMBOSSMENT LOCATION
DIFFERENCE IS SPLIT BETWEEN
TOP AND BOTTOM RAILS

EMBOSSMENT SECTION B-B

SCALE 2X
ALL DIMENSIONS (T.S.C.) TO SHARP CORNER

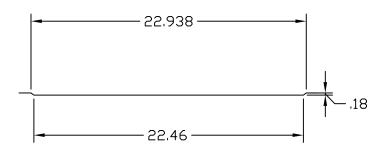



1 PANEL FLAT (SHAKER)
ADA EMBOSSMENT OPTION
FOR STEEL DOORS

1	DWG#	•
		II-20Sada
	DATE	
		1-8-19
	NAME	
		KRB
	SECTION	
		II
	PAGE	
	l	20Q

THIS MATERIAL IS PROPRIETARY AND CONFIDENTIAL TO TAYLOR ENTRANCE SYSTEMS AND SHALL NOT BE REPRODUCED, COPIED OR DISSEMINATED WITHOUT THE EXPRESS WRITTEN PERMISSION OF TAYLOR ENTRANCE SYSTEMS.